


# Data sheet

## Laboratory Shakers

### LS 280

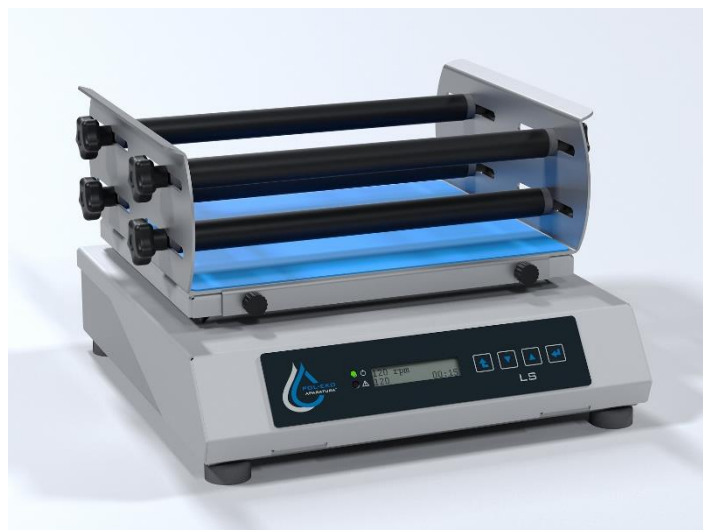

The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.


#### Standard equipment:

- microprocessor control of rotation and time
- LCD digital display
- virable speed control: 30 ... 300rpm
- shaking mode: from 1min to 99h or continuous operation

TECHNICAL DATA	
movement	orbital
controller	microprocessor
display	LCD
speed range [rpm]	30...500
acurracy [rpm]	10
amplitude [mm]	5
max load capacity[kg]	10
shaking mode	1min. ... 99h or continuous operation
<b>dimensions without/with shaking table [mm]</b>	
width	320
heigth	120/220
depth	330
fits to cooled incubator	ILW 53
nominal power [W]	60
weight with shaking table [kg]	10
ambient temperature [°C]	+10...+40
humidity [%]	up to 70
voltage	230 V 50 Hz
warranty	24 months
manufacturrer	POL-EKO-APARATURA

**ACCESSORIES**

universal platform




platform for Petri plates shaking



platform for separatory funnels



platform for fixing flasks handles



anti-skid mat

