



## Data sheet

print date: 2025-12-18


## Drying Oven SLN 180 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### Advantages of the SMART controller:

- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

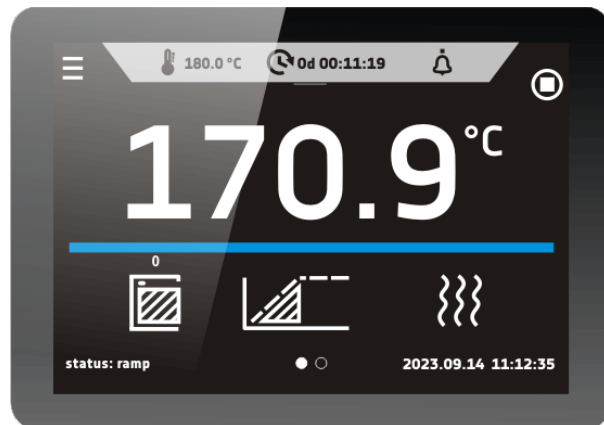

Smart - preview screen

**TECHNICAL DATA**

air convection	natural
chamber capacity [l]	180
working capacity [l]	180
controller	microprocessor PID
display	4,3" full colour touch screen

**TEMPERATURE**

temperature range [°C]	5°C above ambient temperature ... +300°C
temperature resolution every ... [°C]	0,1
temperature fluctuation at 105°C [+/°C]*	0,4
temperature variation at 105°C [+/°C]*	2,3
temperature protection	class 2.0 to DIN 12880 / class 3.1 (option)

**CHAMBER**


door type	solid / door with viewing window (option)
<b>interior</b>	
Smart	acid-proof stainless steel to DIN 1.4301
IG Smart	acid-proof stainless steel to DIN 1.4301
<b>housing</b>	
Smart	powder coated sheet
IG Smart	stainless steel linen finish

**overall dims [mm] /l/**

width A	660
height B	1040
depth C	820

**internal dims [mm]**

width D	460
height E	720
depth F	550

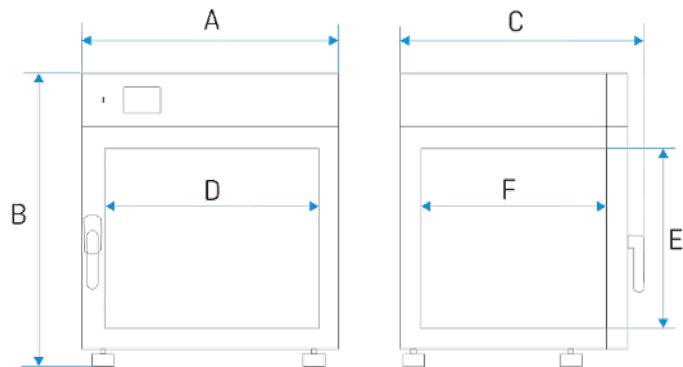

shelves (standard   max)	3   9
max shelf workload [kg] /2/	25
- reinforced shelf version (PW) [kg] /3/	50
max unit workload [kg]	75
- reinforced unit version (W) [kg] /4/	120
weight [kg]	88



**ELECTRICAL PARAMETERS**

voltage	230V 50/60Hz
nominal power [W]	2800
warranty	24 months
manufacturer	POL-EKO®

all the above technical data refer to standard units (without optional accessories)  
 \* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:  
 $K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$   
 \*\* - other power supplies on request  
 1 - depth doesn't include 50 mm of power cable  
 2 - on uniformly loaded surface  
 3 - reinforced shelf  
 4 - reinforced version


**OPTIONS AND ACCESSORIES**

	Order number: */A	door with viewing window
	Order number: */P INOX	Stainless steel wire shelf INOX
	Order number: */PP	Perforated shelf
	Order number: */PW	Reinforced shelf
	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: QLK*	Castors
	Order number: */S or */S INOX	Table with castors
	Order number: */ST or */S INOX	Base on castors
	Order number: */W	Reinforced version
	Order number: OWW/OWW LED	Interior lighting
	Order number: HEPA	HEPA Clean Air Filter



Order number: LabDesk

LabDesk software



Order number: BRT/\*/L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification



Order number: \*/3.1

Over temperature protection 3.1 class according to DIN 12880



Order number: KD

Access control



Order number: RFID LOCK (SMART)

RFID LOCK (SMART)




Order number: BPP 12

Battery backup for display



Order number: PORT ALARM

Dry alarm contact



Order number: LANK

LAN cable



Order number: OCZ/20

Non-standard access port 20 mm



Order number: OCZ/30

Additional access port 30 mm



Order number: OCZ/60

Non-standard access port 60 mm



Order number: OCZ/100

Non-standard access port 100 mm